




LPG Cylinder Valves



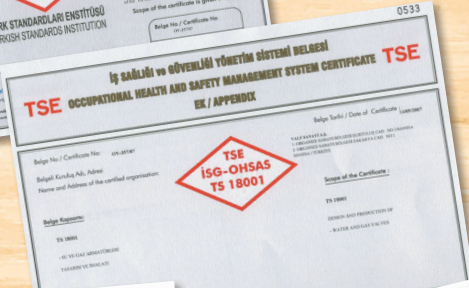

Quick-on Type with safety (External Gasket)


Main Code: 703820037

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	D2
* W19.8x1/14"	* ø 16 (G50)
M26.2x2	ø 19 (G51)
M24x2	H1
M25x2	36.1
W28.8x1/14"	H2
3/4"-14NGT	* 71.6
KG19.3x1/14"	73

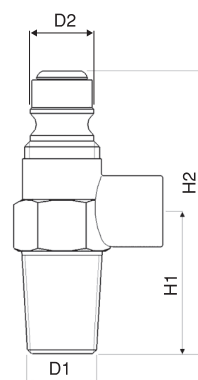

Quick-on Type with safety (External Gasket, Sealing compound W/Conical Gasket)


Main Code: 703820301

Technical Specifications

Working Pressure:
25 bar

Temperature Range:
-20~65°C

D1	D2
16	W3/4"X1/12"
D3	H1
M26.2x2	73
W19,8	72
	H2
	36

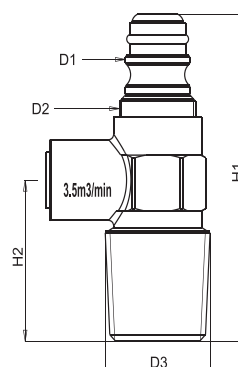

Quick-on Type with safety (Internal Gasket)


Main Code: 703820087

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	d
* W19.8x1/14"	* ø 21 (G53)
M26.2x2	ø 20 (G52)
M24x2	ø 22 (G54)
M25x2	ø 21
W28.8x1/14"	H1
3/4"-14NGT	* 36
KG19.3x1/14"	40
18 T	H2
W 28,8	* 65
L1	69
26.5	

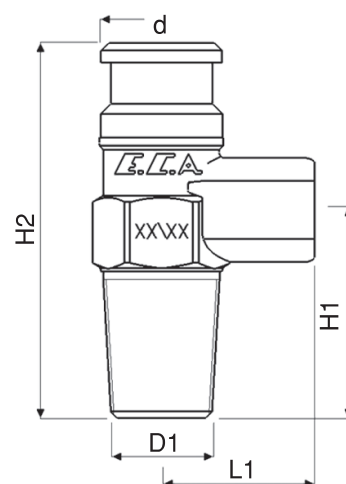

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Quick-on Type with safety (Internal Gasket, Dust Protected)


Main Code: 703820265

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	D2
W19.8x1/14"	ø 16 (G50)
* M26.2x2	ø 19 (G51)
M24x2	* ø 20 (G52)
M25x2	H1
W28.8x1/14"	36.1
3/4"-14NGT	H2
KG19.3x1/14"	71.6

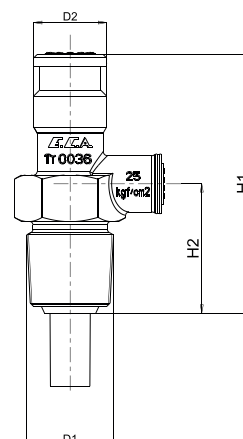

Jumbo Type with safety


Main Code: 703820239

Technical Specifications

Working Pressure:
26 bar

Temperature Range:
-20~65°C

D1	D2
* W28.8x1/14"	ø 35 (G56)
	H1
	37.5
	* 38
	H2
	85
	* 86

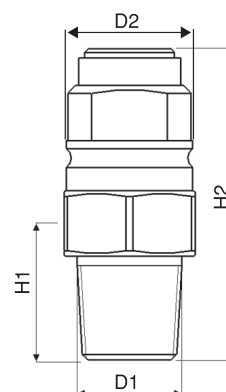

Jumbo Type with safety (Optimized Series)


Main Code: 703820056

Technical Specifications

Working Pressure:
26 bar

Temperature Range:
-20~65°C

D1	D2
* W28.8x1/14"	ø 35 (G56)
	H1
	37.5
	38
	* 37
	H2
	* 85
	86

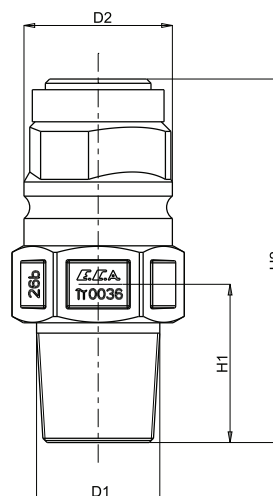

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Jumbo Type With Safety

Main Code: 703820313


Technical Specifications

Working Pressure:
26 bar

D1	H1
W28.8x1/14"	38

Temperature Range:
-40~60°C (Certified)

D2	H2
ø 35	86

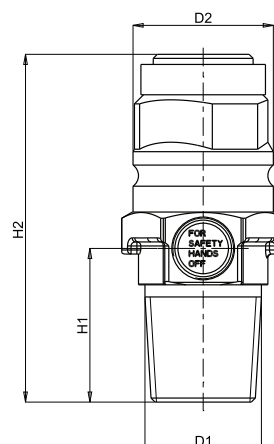

Jumbo Type With Safety (Dust Protected)

Main Code: 703820294


Technical Specifications

Working Pressure:
26 bar

D1	H1
W28.8x1/14"	37

Temperature Range:
-20~65°C

D2	H2
ø 35	85

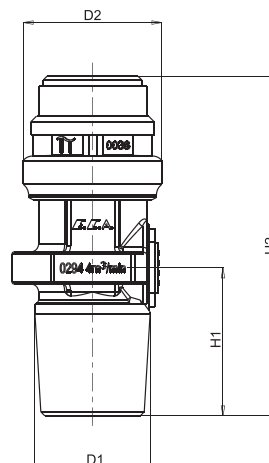

Quick-on Type Without Safety (Internal Gasket)

Main Code: 703820271

Technical Specifications

Working Pressure:
24 bar

D1	H1
* M26.2x2	* 52.5


Temperature Range:
-20~65°C

3/4"-14 NGT	54.5
W19,8 x 1/14"	65

D2	H2
* ø 22	* 21

M 23,2x2	23
* ø 22	36

ø 20	
ø 24,5	

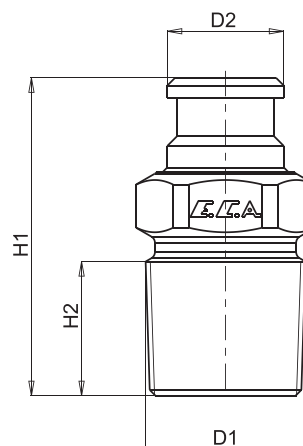

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Hand Wheel Type With Safety (Quick-on outlet)


Main Code: 703820060

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	D2
* M26.2x2	* Ø 16 (G50)
M24x2	Ø 19 (G51)
M25x2	Ø 22 (G54)
W19.8x1/14"	L1
W28.8x1/14"	46.2
3/4"-14NGT	H2
KG19.3x1/14"	84
H1	
39.5	

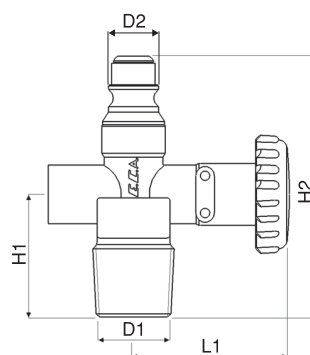

Hand wheel Type with safety (Double pin design)


Main Code: 703820184

Technical Specifications

Working Pressure:
24 bar - 26 bar

Temperature Range:
-20~65°C

D1	D2	H3
* M26.2x2	* W21.8x1/14"	86.8
M24x2	[G4,G12]	* 87,2
M25x2	W20x1/14" [G1]	88
W19.8x1/14"	0.885"-14NG0 [G9]	96
W28.8x1/14"	W21.7x1/14" [G2]	93
3/4"-14NGT	W21.8x1/14" Sol	
KG19.3x1/14"	H2	
H1	* 45	
36	41,3	
39	48,5	
36,5	46	



Hand wheel type with safety


Main Code: 703820001

Technical Specifications

Working Pressure:
35 bar

Temperature Range:
-20~65°C

D1	D2	H2
* M26.2x2	* W21.8x1/14"	41.3
M24x2	[G4,G12]	42.5
M25x2	W20x1/14" [G1]	* 45
W19.8x1/14"	0.885"-14NG0 [G9]	61
W28.8x1/14"	W21.7x1/14" [G2]	H3
3/4"-14NGT	W22x1/22"	85.5
KG19.3x1/14"	H1	* 87
	33.3	80
		111



Hand wheel Type with safety (Outlet with frontal gasket)

Main Code: 703820251


Technical Specifications

Working Pressure:
30 bar

D1	D2
W 19.8x1/14"	W21.8x1/14"

Temperature Range:
-20~65°C

H1	H2	H3
34.3	42.3	87.2

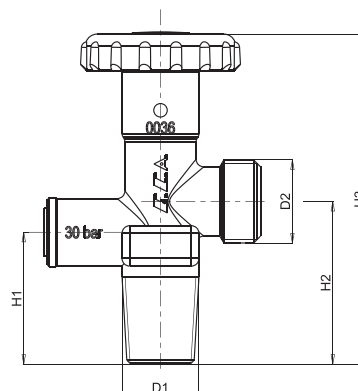

Hand wheel type with safety (Orbital pin design)

Main Code: 703820329



Technical Specifications

Working Pressure:
24 bar

D1	H1
W19.8-x1/14"-3/25	24

Temperature Range:
-20~65°C

D2	H2	H3	H4
W21.8x1/14"-LH	33	40	89.6

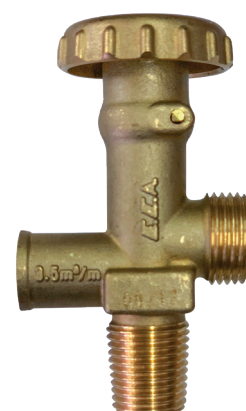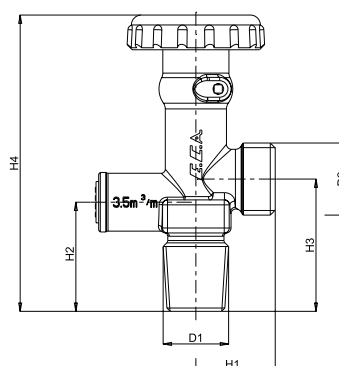

Hand wheel type with safety (Double pin design)

Main Code: 703820331


Technical Specifications

Working Pressure:
25 bar

D1	H1
W28.8x1/14"	61

Temperature Range:
-20~65°C

D2	H2	H3	H4
W22x1/22"	50	111	27.5

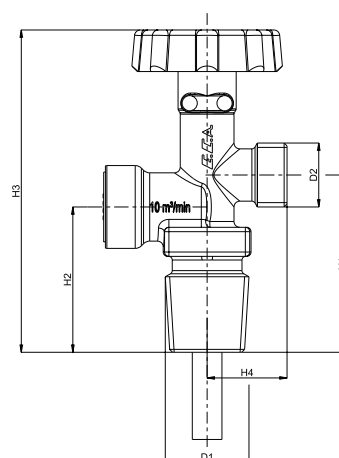

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Hand wheel type with safety (Double pin design)


Main Code: 703820336

Technical Specifications

Working Pressure:
26 bar

Temperature Range:
-20~65°C

D1	H1
W28.8-1/14"	27.5
D2	H2
W21.8x1/14"sol	39
H3	48.5
H4	96.1

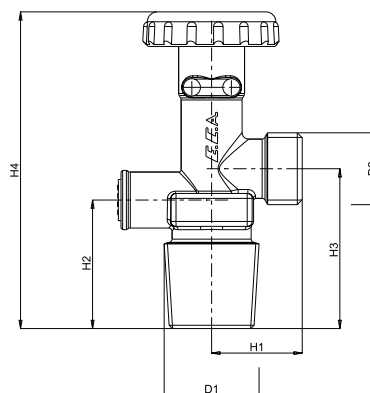

Pol valve with safety


Main Code: 703820238

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H2
* 3/4"-14NGT	53
W28,8	59
D2	45
* 0.885"-14NGO (G9)	* 49
G 5/8	H3
H1	97.8
44	101
49,1	92,6
* 41	* 92,5



Aluminium Hand wheel type with safety


Main Code: 703820341

Technical Specifications

Working Pressure:
26 bar

Temperature Range:
-20~65°C

D1	H2
3/4"-14NGT	41
D2	H3
0.885"-14NGO(G9)	105.5
H1	H4
51	35.5
H5	34

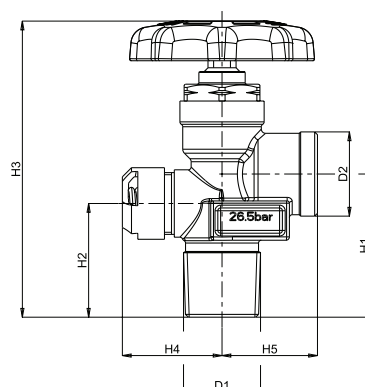

Hand wheel type without safety (Double pin design)


Main Code: 703820089

Technical Specifications

Working Pressure:
18,5 bar

Temperature Range:
-20~65°C

D1	D2
* M26.2x2	W21.8x1/14" (G4,G12)
M24x2	* W20x1/14" (G1)
M25x2	0.885"-14NG0 (G9)
W19.8x1/14"	W21.7x1/14" (G2)
W28.8x1/14"	
3/4"-14NGT	
KG19.3x1/14"	
H1	H2
	* 75
* 33	87
40	* 88,2
* 46	68
	80
27.4	87,2
44,5	82,5
42,3	89
43	85,4
37,8	75
39,5	88

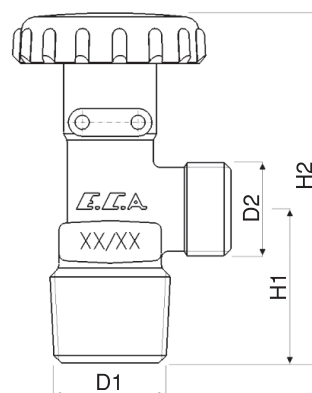

Hand wheel type without safety (with flow limiter)


Main Code: 703820281

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H1
*M24x2 Conical 1/10	43
W19,8x1/14"	H2
KG19,3	89
D2	
W21.7x1/14"-LH	
D3	
13	

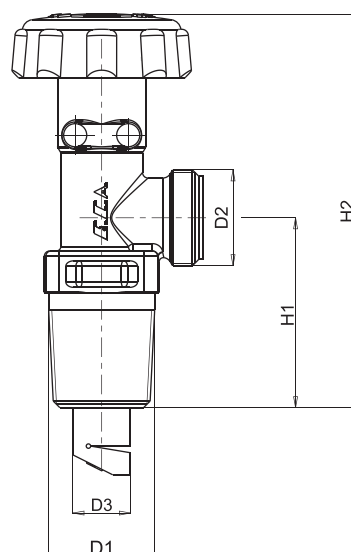

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Hand wheel type without safety (Orbital pin design)


Main Code: 703820288

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H2
W19.8-x1/14"-3/25	38
D2	H3
W21.8x1/14"sol	24
H1	H4
13	87.6

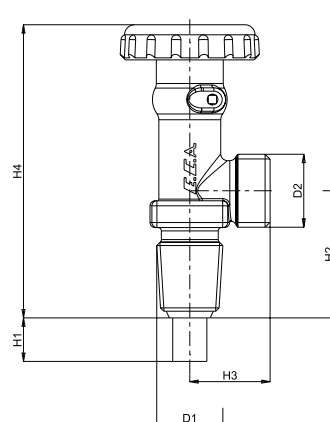

Hand wheel type without safety (Double pin design)


Main Code: 703820334

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H2
W19.3-x1/14"	38
D2	H3
ø 22	91.6
H1	
44	

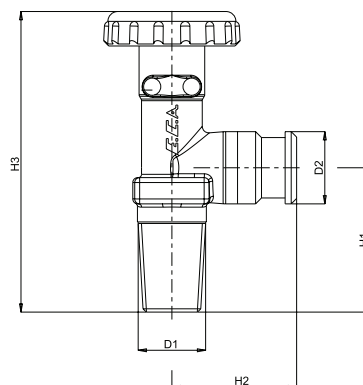

Hand wheel type without safety (Orbital pin design)



Main Code: 703820345

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H1	H3
* M26.2x2	* 35	* 71
M24x2	36	72
1/2" API		
D2	H2	
W20x1/14"	26	

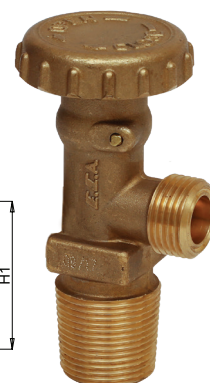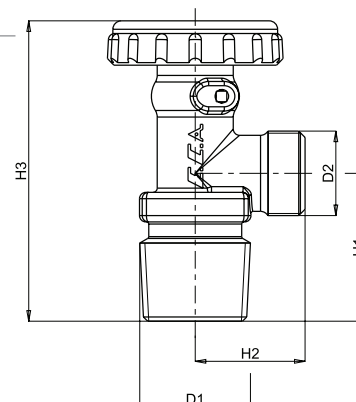

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Hand wheel type without safety (Double pin design)

Main Code: 703820355

Technical Specifications

Working Pressure:
17 bar

D1

H2

3/4"-14 BSPT

83

Temperature Range:
-20~65°C

D2


H3

0.885"-14 NGO

34.5

H1

41

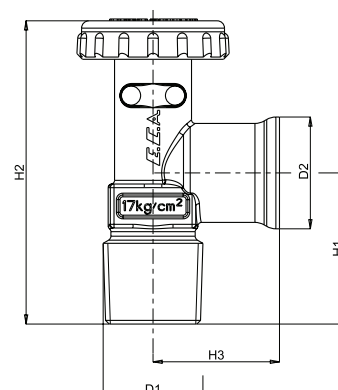

Mini Valve with safety (Hand wheel type)

Main Code: 703820300

Technical Specifications

Working Pressure:
24 bar

D1

L

1/2"-14NGT

45

Temperature Range:
-20~65°C

D2



H

W20x1/14" Left

60

H1

38



Mini Valve without safety (Hand wheel type)

Main Code: 703820273

Technical Specifications

Working Pressure:
24 bar

D1

L

W20x1/14"

44



Temperature Range:
-20~65°C

D2

H

1/2"-14NGT

60



Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Mini Valve with Ball


Main Code: 703820119

Technical Specifications

Working Pressure:
11 bar

Temperature Range:
-20~65°C

D1	D2
M14x1.25	* M22x1.25
* M16x1.5	W20x1/14"
5/8" UNC	H1
G 3/8"	33



Mini Valve with Ball


Main Code: 703820289

Technical Specifications

Working Pressure:
11 bar

Temperature Range:
-20~65°C

D1	H1
M22x1.25	32.5
D2	
M16x1.5	

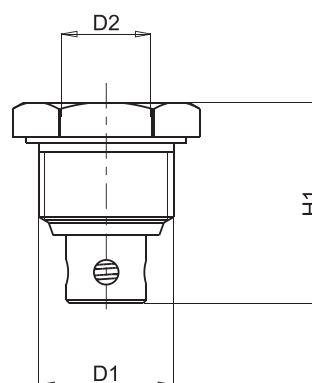

Mini Valve with Ball (Flange design)


Main Code: 703820058

Technical Specifications

Working Pressure:
11 bar

Temperature Range:
-20~65°C

D1	H1
33.5	32.5
D2	H2
M16x1.5	17.5
D3	
M22x1,25	

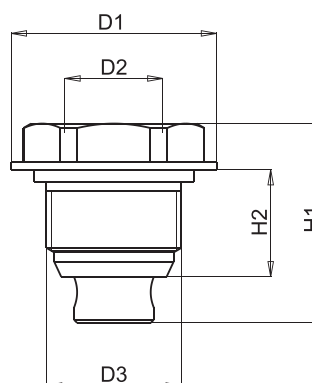

Mini type valve with pin


Main Code: 703820219

Technical Specifications

Working Pressure:
11 bar

Temperature Range:
-20~65°C

D1	H1
3/4"-14 NGT (ANSI B57-1 1977)	35
D2	
5/8"-11 UNC-2B	

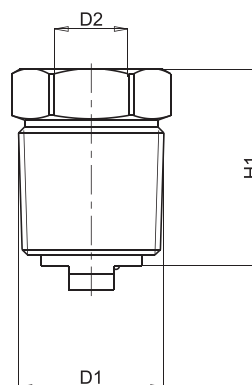

Mini type valve with pin


Main Code: 703820112

Technical Specifications

Working Pressure:
11 bar

Temperature Range:
-20~65°C

D1	L
* W20x1/14"	34.6
M22x1.25	AA/SW
D2	27
M14x1.25	
H	11

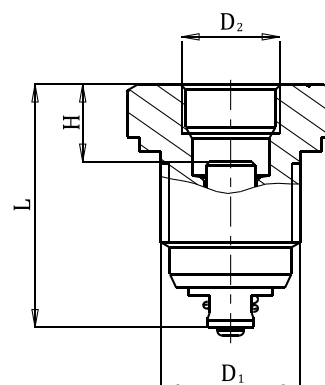

LPG Safety valve


Main Code: 703820342

Technical Specifications

Working Pressure:
26 bar

Temperature Range:
-20~65°C

D1	H2
3/4" - 14NGT	36
D2	
W9/16-1/26"	

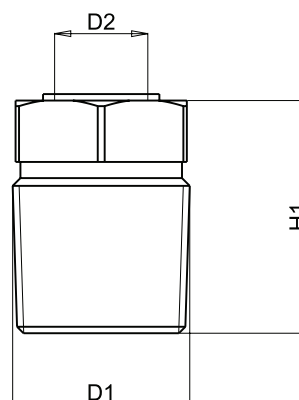

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

LPG Interval Valve

Main Code: 703820030


Technical Specifications

Working Pressure:
30 bar

D1	H1
G1/2	47.2

Temperature Range:
-20~65°C

L1
53



LPG Filling Valve for Auto

Main Code: 703820269



Technical Specifications

Working Pressure:
11 bar

D1	H2	H1
M20x1	30	72

Temperature Range:
-20~65°C

D2	H3
M13x1.5	55.2

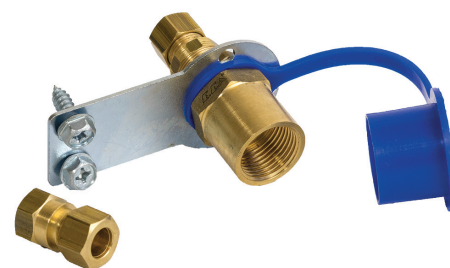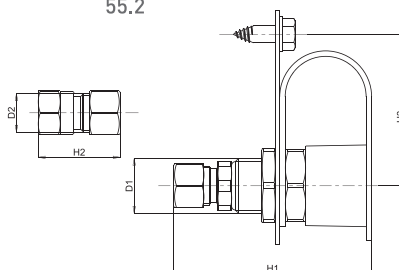

Forklift valve without safety

Main Code: 703820057

Technical Specifications



Working Pressure:
24 bar

D1	H1
W 19,8 x 1/14"	85

Temperature Range:
-20~65°C

D2	H2
W 21,8 x 1/14" Left	41,3

L	H3
145	110

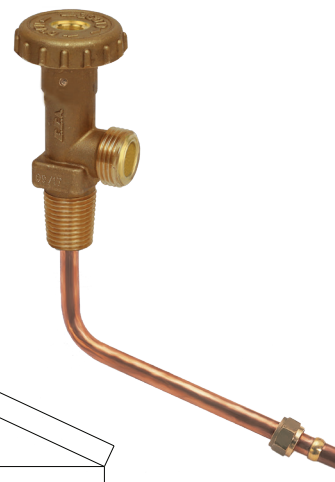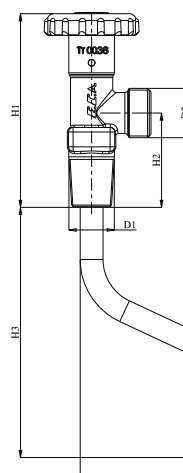

Forklift valve with safety (Double pin design)


Main Code: 703820094

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H1
* M26.2x2 Conical 1/10	43,5
D2	H2
W 28,8	* 52,5
	42
	43
H3	
	* 93
	92,2
	90,6

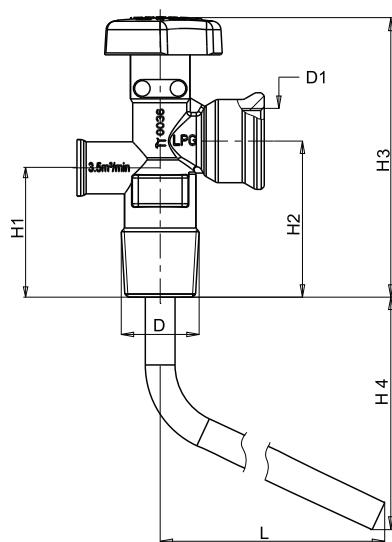

Forklift valve with safety (Double pin design)



Main Code: 703820206

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H1
W 19.8x1/14" 3/25 Conical	43,5
D2	H2
W 28,8	41
*M26,2x2	53
D1	H3
Ø 10	84
D2	
0.885"-14 NGO -LH	96
	92

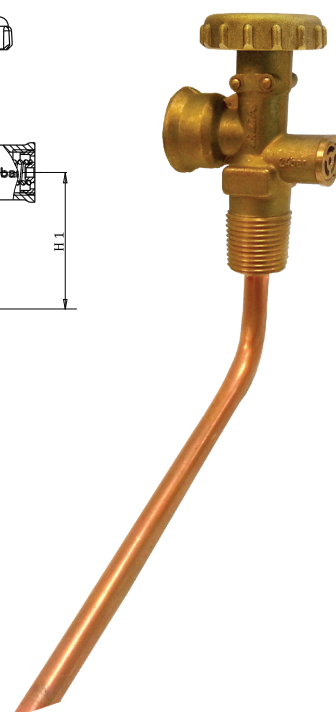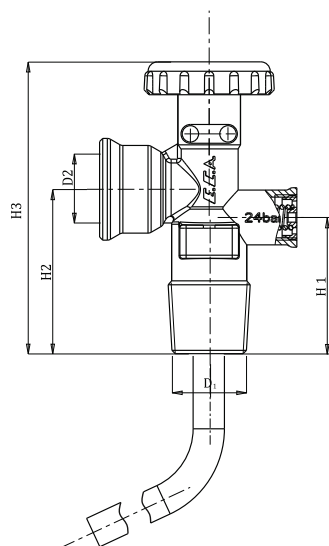

Due to constant improvement on products we reserve the right to alter specifications at any time without prior notice.
E.C.A.'s LPG CYLINDER VALVES conform to EN ISO 14245 (Ex. EN 13152), EN ISO 15995 (Ex. EN 13153), EN 13953, EN 15202, SI 637 standards
Product code is given for (*) marked dimensions.

Forklift valve without safety


Main Code: 703820230

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H1
W19.8x1/14" Conical 3/25	41
D2	H2
0,885-14N60-LH	84
	H3
	187

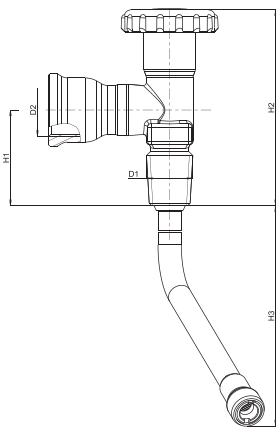

Union hose for forklift valve


Main Code: 703817020

Technical Specifications

Working Pressure:
24 bar

Temperature Range:
-20~65°C

D1	H2
ø 34	32
H1	
81.1	

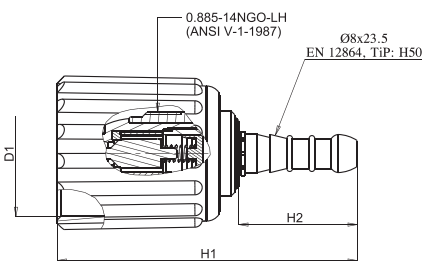

Notes



www.valf.com.tr

www.eca.com.tr

İhracat Satış - Export Sales

ELEKS DIŞ TİCARET A.Ş.

Kemeraltı Caddesi, Ümmehan, No:17, Karaköy
34425 Beyoğlu / İstanbul / TURKEY
Phone: +90 (0212) 708 48 50 Fax: +90 (212) 292 80 36
www.eleks.com.tr eleks@eleks.com.tr

Üretici / Yurt İçi Satış - Producer / Domestic Sales

VALF SANAYİİ A.Ş.

Organize Sanayi Bölgesi, Kurtuluş Cad. No:1
45030 / Manisa / TURKEY
Phone: +90 (236) 233 25 60 Fax: +90 (236) 233 25 63
www.valf.com.tr info@valf.com.tr